

Timing Pulleys

MXL Type Pitch 2.032

MXL019	MXL025	MXL037	MXL050	Pitch	Material		Surface Treatment
Belt Width 4.8 (3/16 Inch)	Belt Width 6.4 (1/4 Inch)	Belt Width 9.5 (3/8 Inch)	Belt Width 12.7 (1/2 Inch)		Pulley	Flange	
EAC01	EAC11	EAC31	EAC51	2.032	Aluminum Alloy	SPCC	Clear Anodize
—	EAC22	EAC42	—		S45C		Black Oxide

Tap Hole Dimensions (Shaft Bore: P / N)

Shaft Bore Inner Dia. d _{H7}	M (Coarse)	Accessories Set Screw
3~5	M3	M3×3
6~18	M4	M4×3
19~21	M5	M5×4




① When the material of the timing pulley is S45C, the retaining ring has flanging type.




Self-made

Tooth Profile
(ISO Standard Rack Dimensions)




① The size with * is suitable for the number of teeth below 23.


Pulley Shape
Shape A




Pulley Shape
Shape B



Pulley Shape
Shape K




3/



* When the material is aluminum profile: $t_1 = (W-A)/2-0.5$, When the material is S45C: $t_1 = 1.5$.

Shaft Bore Spec.

P Round Hole + Tap



① Not available for A Shape.

N New JIS Keywayed Bore + Tap



① A Shape has keywayed bores only, not tapped holes.
② For Keyway Dimension Details, refer to the Timing Pulleys product introduction.

① To avoid damaging the integrity of the teeth, the screw hole is selected to be machined at the bottom of the tooth. Therefore, when the number of teeth cannot be divided equally as trisection, the screw hole will be drilled at the bottom of the closest teeth. And the angle of the screw hole will have slight deviation in that case, will not be exactly 120°

Part Number		Pulley Shape	Shaft Bore Spec.	Shaft Bore Spec. d _{H7} (1mm Increment)			P.D.	O.D.	D	F	E	Type Nominal Width		
Code	Teeth			Shape A	Shape B	Shape K						A	W	L
(Aluminum Alloy)	14	A			3-4		9.06	8.55	12	12	6	Belt Width 4.8 MXL019 A:6 W:10 L:16.5		
	15				3-4		9.70	9.19		12	6			
	16				3-4-5		10.35	9.84		14	8			
	17				3-4-5		11.00	10.49		14	8			
	18	K			3-4-5		11.64	11.14	14	14	8	Belt Width 6.4 MXL025 A:7.5 W:11.5 L:18		
	19				3-4-5		12.29	11.78		14	8			
	20				4-5		12.94	12.43		18	11			
	21				4-5		13.58	13.07	9	18	11			
	22				4-5		14.23	13.72		18	11	Belt Width 9.5 MXL037 A:11 W:15 L:22		
	23				3-7		14.88	14.37		20	13			
	24				3-7		15.52	15.02	11	20	13			
	25				3-7		16.17	15.66		20	13			
	26				3-8		16.82	16.31		22	14	Belt Width 12.7 MXL050 A:14 W:18 L:25		
	27				4-8		17.46	16.96	12	22	14			
	28				4-8		18.11	17.60		22	14			
	30				4-8		19.40	18.90		26	16			
(S45C)	32	A			8	4-8	20.70	20.19	14	26	16			
	34				8	4-8	21.99	21.48		25	16			
	36				8-11	5-10	23.29	22.78	16	28	18			
	38				8-11	5-10	24.58	24.07		28	18			
	40	B			8-13	5-10	25.87	25.36	18	30	20			
	42				8-13	5-10	27.17	26.66		30	20			
	44				8-16	5-12	28.46	27.95		32	23			
	46				8-16	5-12	29.75	29.24	20	32	23			
	48				8-17	5-13	31.05	30.54		35	25			
	50				8-18	5-13	32.34	31.84	22	35	25			
	60				8-22	5-20	38.81	38.30	28	44	32			
	72				8-20	5-21	46.57	46.06	30	52	40			

① Shaft Bore Dia. 9 is not available for Shaft Bore specification N.

② Select N-d10K when New JIS Keywayed Bore + Tap with shaft bore diameter of 10 and keyway width 4.0 mm (height 1.8 mm) is requested. (Refer to the Timing pulley product introduction)



Please order as shown

Part Number		Pulley Shape	Shaft Bore Spec.	Shaft Bore Spec. d _{H7} (1mm Increment)		
Code	Teeth			Shape A	Shape B	Shape K
EAC01-MXL019	50	A	P	8-18	5-13	6-13
EAC11-MXL025	60	B	N	8-22	5-20	8-16
EAC11-MXL025 - 50 - B - N - d12						



Discount price
Per 1~4
Price 100%
Additional quotation



Delivery
4

① Aluminum Alloy



Delivery
11

① S45C

XL Type ▶ Pitch 5.08

Timing Pulleys

XL025	XL031	XL037	XL050	Pitch	Material		Surface Treatment
Belt Width 6.4 (1/4 Inch)	Belt Width 7.9 (5/16 Inch)	Belt Width 9.5 (3/8 Inch)	Belt Width 12.7 (1/2 Inch)		Pulley	Flange	
EAFO1	EAFO1	EAFO1	EAFO1	5.08	Aluminum Alloy		Clear Anodize
EAFO12	—	EAFO12	EAFO12		S45C	SPCC	Black Oxide

■ Tapped Hole Dimensions (Shaft Bore: P / N)

Shaft Bore Inner Dia. d _{H7}	M (Coarse)	Accessories Set Screw
4	M3	M3×3
5~12	M4	M4×3
13~17	M5	M5×4
18~30	M6	M6×5






① When the material of the timing pulley is S45C, the retaining ring has flanging type.




Self-made

Timing Pulleys
Timing Belts

■ Tooth Profile (ISO Standard Rack Dimensions)




* When the material is aluminum profile: $t_1 = (W-A)/2 - 0.5$, When the material is S45C: $t_1 = 1.5$.



The first perspective

■ Shaft Bore Spec.

P Round Hole + Tap



① Not applicable to A Shape with 15 or less teeth and nominal width XL025.

N New JIS Keywayed Bore + Tap



① A Shape with 15 or less teeth and nominal width XL025 has keywayed bores only, not tapped holes.
② For Keyway Dimension Details, refer to the Timing Pulleys product introduction.

① To avoid damaging the integrity of the teeth, the screw hole is selected to be machined at the bottom of the tooth. Therefore, when the number of teeth cannot be divided equally as trisection, the screw hole will be drilled at the bottom of the closest teeth. And the angle of the screw hole will have slight deviation in that case, will not be exactly 120°

Part Number		Pulley Shape	Shaft Bore Spec.	Shaft Bore Spec. d _{H7} (1mm Increment)				P.D.	O.D.	D	F	E	Type Nominal Width		
Code	Teeth			Shape A		Shape B							A	W	L
(Aluminum Alloy) EAF01-XL025 EAF21-XL031 EAF31-XL037 EAF51-XL050	10			—	—	5-6	—	16.17	15.66	10	24	12	Belt Width 6.4 XL025 A:7.5 W:12.5 L:21		
	11			—	—	5-6	—	17.79	17.28	12	24	12			
	12			4-6	—	5-6	—	19.40	18.90	12	25	15			
	14			5-9	8	6-8	8	22.64	22.13	15	28	18			
	15			5-11	8-10	6-10	8-10	24.26	23.75	17	32	20	Belt Width 7.9 XL031 A:9 W:14 L:23		
	16			6-13	8-10K	6-10	8-10	25.87	25.36	17	32	20			
	18			6-15	8-13	6-13	8-13	29.11	28.60	21	36	24			
	19			6-15	8-14	6-15	8-13	30.72	30.22	21	36	24			
	20			8-16	8-16	8-15	8-15	32.34	31.83	24	40	27	Belt Width 9.5 XL037 A:11 W:16 L:25		
	21			8-18	8-16	8-16	8-16	33.96	33.45	24	40	27			
	22			8-20	8-17	8-18	8-18	35.57	35.07	26	45	30			
	24			8-22	8-19	8-18	8-18	38.81	38.30	26	45	30			
(S45C) EAF12-XL025 EAF42-XL037 EAF62-XL050	25	A	P	8-22	8-21	8-19	8-19	40.43	39.92	30	48	35	Belt Width 12.7 XL050 A:14 W:19 L:28		
	26	A	P	8-23	8-22	8-20	8-20	42.01	41.53	30	48	35			
	28	B	N	8-26	8-25	8-25	8-20	45.28	44.77	35	55	40			
	30	B	N	10-30	10-28	10-25	10-20	48.51	48.00	35	55	40			
	32			10-30	10-30	10-30	10-25	51.74	51.24	40	61	45			
	34			10-30	10-30	10-30	10-25	54.98	54.47	40	61	45			
	36			10-30	10-30	10-30	10-25	58.21	57.70	40	67	50			
	38			10-30	10-30	10-30	10-25	61.45	60.94	40	67	50			
	40			10-30	10-30	10-30	10-25	64.68	64.17	40	74	58			
	42			10-30	10-30	10-30	10-25	67.91	67.41	40	74	58			
	44			10-30	10-30	10-30	10-25	71.15	70.64	40	80	60			
	46			10-30	10-30	10-30	10-25	74.38	73.87	40	80	60			
48			10-30	10-30	10-30	10-25	77.62	77.11	40	87	67				
50			10-30	10-30	10-30	10-25	80.85	80.34	40	87	67				
60			10-30	10-30	10-30	10-25	97.01	96.51	40	104	84				
72			10-30	10-30	10-30	10-25	116.43	115.92	40	123	102				

① Shaft Bore Dia. 9 is not available for Shaft Bore specification N.

① Shaft Bore Dia. 6.35 is selectable for Shaft Bore specifications P.

① Select N-d10K when New JIS Keywayed Bore + Tap with shaft bore diameter of 10 and keyway width 4.0 mm (height 1.8 mm) is requested. (Refer to the Timing pulley product introduction)



Please order as shown

Part Number	Teeth	Pulley Shape	Shaft Bore Spec.	Shaft Bore Spec. d _{H7} (1mm Increment)			
Code				Shape A		Shape B	
EAFO1-XL025	36	A	P	P	N	P	N
EAFO1-XL031	36	B	N	P	N	P	N
EAFO1-XL037	36	B	N	P	N	P	N
EAFO1-XL050	36	B	N	P	N	P	N

EAFO1-XL025 — 38 — A — N — d20



Discount price	Per	1~4	5~
Price	100%	Additional quotation	



Delivery	4
----------	---

① Aluminum Alloy



Delivery	11
----------	----

① S45C

◀ **L Type**
Pitch 9.525

L050	L075	L100	L150	Pitch	Material		Surface Treatment
Belt Width 12.7 (1/2 Inch)	Belt Width 19.1 (3/4 Inch)	Belt Width 25.4 (1 Inch)	Belt Width 38.1 (1.5 Inch)		Pulley	Flange	
EAJ01	EAJ21	EAJ41	EAJ61	9.525	Aluminum Alloy		Clear Anodize
EAJ12	EAJ32	EAJ52	EAJ72		S45C	SPCC	Black Oxide

■ Tapped Hole Dimensions (Shaft Bore: P / N)

Shaft Bore Inner Dia. d _{H7}	M (Coarse)	Accessories Set Screw
8~12	M4	M4×3
12.7~17	M5	M5×4
18~30	M6	M6×5
31~45	M8	M8×6
46~65	M10	M10×8



! When the material of the timing pulley is S45C, the retaining ring has flanging type.






Self-made

Pulley Shape


Shape **A**

Pulley Shape
Shape B



* When the material is aluminum profile: $t_1=(W-A)/2-0.5$, When the material is S45C: $t_1=1.5$.

❗ $t_1=2.0$ for 60 and 72 toothed pulleys (Cut Flange).




The first perspective

Shaft Bore Spec.

P Round Hole + Tap

New JIS Keywaved Bore + Tap



 For Keyway Dimension Details, refer to the Timing Pulleys product introduction

⑨ To avoid damaging the integrity of the teeth, the screw hole is selected to be machined at the bottom of the tooth. Therefore, when the number of teeth cannot be divided equally as trisection, the screw hole will be drilled at the bottom of the closest teeth. And the angle of the screw hole will have slight deviation in that case, will not be exactly 120°

Part Number		Pulley Shape	Shaft Bore Spec.	Shaft Bore Spec. d _{H7} (1mm Increment)				P.D.	O.D.	D	F	E	Type Nominal Width		
Code	Teeth			Shape A		Shape B							A	W	L
				P	N	P	N								
(Aluminum Alloy)	12			8~18	8~16	8~18	8~18	36.38	35.62	27	45	30	Belt Width 12.7 L050 A:14 W:19 L:31(39) ★		
	14			8~21	8~21	8~20	8~20	42.45	41.68	30	48	35			
	15			8~23	8~23	8~20	8~20	45.48	44.72	34	48	35			
	16			10~26	10~23	10~22	10~22	48.51	47.75	32	55	40			
	17			10~26	10~26	10~24	10~23	51.54	50.78	34	55	40			
	18			10~29	10~29	10~26	10~23	54.57	53.81	36	61	45			
	19			12~34	12~30	12~28	12~25	57.61	56.84	38	67	50			
	20			12~34	12~30	12~30	12~26	60.64	59.88	40	67	50			
	21			12~40	12~32	12~30	12~26	63.67	62.91	42	70	56			
	22			12~42	12~34	12~33	12~30	66.70	65.94	45	80	60			
EAJ01-L050	24	A		12~49	12~41	12~38	12~30	72.77	72.00		87	67	Belt Width 19.1 L075 A:21 W:26 L:38(46) ★		
EAJ21-L075	25			12~49	12~41	12~38	12~30	75.80	75.04		87	67			
EAJ41-L100	26		12~49	12~41	12~38	12~30	78.83	78.07	50		87	67			
EAJ61-L150	28	B	P		12~57	12~49	12~38	12~30	84.89	84.13		95		75	
	30				12~62	12~50	12~42	12~34	90.96	90.20		99		80	
(S45C)	EAJ12-L050	32	N		14~65	14~50	14~42	14~34	97.02	96.26	56	104	84	Belt Width 25.4 L100 A:27 W:32 L:44(53) ★	
	EAJ32-L075	34			14~65	14~50	14~49	14~41	103.08	102.32		111	90		
	EAJ52-L100	36		16~65	16~50	14~49	14~41	109.15	108.39		123	102			
	EAJ72-L150	38		16~65	16~50	16~49	16~41	115.21	114.45	63	127	105			
		40		16~65	16~50	16~49	16~41	121.28	120.51		131	110			
		42			16~65	16~50	16~57	16~49	127.34	126.58		135	115	Belt Width 38.1 L150 A:40 W:45 L:57	
		44		16~65	16~50	16~57	16~49	133.40	132.64		140	120			
		46		16~65	16~50	16~57	16~49	139.47	138.71		144	125			
		48		16~65	16~50	16~57	16~49	145.53	144.77		152	130			
		50		16~65	16~50	16~57	16~49	151.6	150.83	71	160	140			
EAJ12-L050	60	A			16~65	16~50	16~57	16~49	181.91	181.15		190	160	★ L dimensions in () are for 60 or 72 toothed pulleys.	
EAJ32-L075	72			16~65	16~50	16~57	16~49	218.3	217.53		225	194			

⚠ Shaft Bore Dia. 9 are not available for Shaft Bore specification N.

! Select **N-d10K** when New JIS Keywayed Bore + Tap with shaft bore diameter of 10 and keyway width 4.0 mm (height 1.8 mm) is requested. (Refer to the Timing pulley product introduction)

Available number of teeth with nominal width **L150** is up to 50.



Part Number		Pulley Shape	Shaft Bore Spec.	Shaft Bore Spec. dH7 (1mm Increment)			
Code	Teeth			Shape A		Shape B	
				P	N	P	N
EAJ01-L050	48	A	P	16-65	16-50	16-57	16-59
EAC2-L075	48	B	N				

FAJ21-L075-46-A-N-d40



Per	1~4	5~
Price	100%	Additional quotation



H Type ▶ Pitch 12.7

Timing Pulleys

H075	H100	H150	H200	Pitch	Material		Surface Treatment
Belt Width 19.1 (3/4 Inch)	Belt Width 25.4 (1 Inch)	Belt Width 38.1 (1.5 Inch)	Belt Width 50.8 (2 Inch)		Pulley	Flange	
EAL01	EAL21	EAL41	EAL61	12.7	Aluminum Alloy		Clear Anodize
EAL12	EAL32	EAL52	EAL72		S45C	SPCC	Black Oxide

■ Tapped Hole Dimensions (Shaft Bore: P / N)


Shaft Bore Inner Dia. dH7	M (Coarse)	Accessories Set Screw
12	M4	M4×3
12.7~17	M5	M5×4
18~30	M6	M6×5
31~45	M8	M8×6
47~65	M10	M10×8



① When the material of the timing pulley is S45C, the retaining ring has flanging type.




Tooth Profile
(ISO Standard Rack Dimensions)




① The R size with * is suitable for the number of teeth below 19.

Pulley Shape
Shape A




Pulley Shape
Shape B



① $t_1 = 2.0$ for 40~50 toothed pulleys. (Cut Flange)


* When the material is aluminum profile: $t_1 = (W-A)/2 - 0.5$. When the material is S45C: $t_1 = 1.5$.



The first perspective

■ Shaft Bore Spec.

P Round Hole + Tap



N New JIS Keywayed Bore + Tap



① For Keyway Dimension Details, refer to the Timing Pulleys product introduction.

① To avoid damaging the integrity of the teeth, the screw hole is selected to be machined at the bottom of the tooth. Therefore, when the number of teeth cannot be divided equally as trisection, the screw hole will be drilled at the bottom of the closest teeth. And the angle of the screw hole will have slight deviation in that case, will not be exactly 120°

Part Number		Pulley Shape	Shaft Bore Spec.	Shaft Bore Spec. d _{H7} (1mm Increment)				P.D.	O.D.	D	F	E	Type Nominal Width		
Code	Teeth			Shape A		Shape B							A	W	L
				P	N	P	N								
(Aluminum Alloy)	14			12-30	12-29	12-29	12-25	56.60	55.22	39	61	45	Belt Width 19.1 H075 A:21 W:26 L:41		
	15			12-34	12-30	12-33	12-29	60.64	59.27	45	67	50			
	16			12-40	12-35	12-36	12-30	64.68	63.31		70	56			
	17			12-44	12-40	12-36	12-30	68.72	67.35	48	80	60			
	18			12-44	12-43	12-38	12-35	72.77	71.39		80	60	Belt Width 25.4 H100 A:27 W:32 L:47(38~=L:53) 72 =L:58		
	EAL01-H075			14-49	14-46	14-38	14-35	76.81	75.44	50	87	67			
	EAL21-H100			14-50	14-50	14-46	14-38	80.85	79.48		87	67			
	EAL41-H150			14-57	14-50	14-46	14-38	84.89	83.52	58	95	75			
	EAL61-H200			14-57	14-50	14-46	14-38	88.94	87.56		95	75			
	22			16-65	16-50	16-46	16-38	97.01	95.65		104	84			
(S45C)	24	B		16-65	16-50	16-46	16-38	97.01	95.65		104	84	Belt Width 38.1 H150 A:40 W:45 L:60(38~=L:65) 72 =L:70		
	25		P	16-65	16-50	16-49	16-41	101.06	99.69		111	90			
	EAL12-H075			20-65	20-50	20-49	20-41	105.11	103.73		111	90			
	26			20-65	20-50	20-49	20-41	113.19	111.82	63	123	102			
	EAL32-H100			20-65	20-50	20-49	20-41	121.28	119.90		127	105			
	EAL52-H150			20-65	20-50	20-49	20-43	129.36	127.99		135	115			
	EAL72-H200			20-65	20-50	20-57	20-49	137.45	136.07	71	144	125			
	32			20-65	20-50	20-57	20-49	145.53	144.16		152	130			
	34			20-65	20-50	20-57	20-49	153.62	152.24		165	140			
	36			20-65	20-50	20-57	20-49	161.70	160.33		170	150			
(S45C)	38			20-65	20-50	20-57	20-49	169.79	168.41		180	155	Belt Width 50.8 H200 A:54 W:59 L:74		
	EAL12-H075			20-65	20-50	20-57	20-49	177.87	176.50	88	190	170			
	EAL32-H100			20-65	20-50	20-57	20-49	194.04	192.67		205	180			
	EAL52-H150			20-65	20-50	20-57	20-49	202.13	200.76		210	185			
	EAL72-H200			20-65	20-50	20-57	20-49								
	40														
42															
44															
48															
EAL72-H200															

① Available number of teeth with nominal width H075 and H200 is up to 36.



Please order as shown

Part Number	Pulley Shape	Shaft Bore Spec.	Shaft Bore Spec. dH7 (1mm Increment)
Code	Teeth		P N P N
EAL01-H075	14	A	P
EAL21-H100	15	B	N
EAL01-H075 - 16 - A - N - d20	16	B	N



Discount price
Per 1~4 5~
Price 100% Additional quotation



① Aluminum Alloy



① S45C

www.yhdfa.vn

Factory Automation Parts
One-Stop Purchasing Platform

Minimize procurement costs.
Ordering online saves more time.

Improve efficiency and save 50% design time !

3D model library Example Catalog for selection

Timing Pulleys

T5 Type Pitch 5.0

T5100	T5150	T5200	T5250	Pitch	Material		Surface Treatment
Belt Width 10	Belt Width 15	Belt Width 20	Belt Width 25		Pulley	Flange	
EAP01	EAP21	EAP41	EAP61	5.0	Aluminum Alloy		Clear Anodize
EAP12	EAP32	EAP52	EAP72		S45C	SPCC	Black Oxide

☑ Tapped Hole Dimensions (Shaft Bore: P / N)

Shaft Bore Inner Dia. d _{H7}	M (Coarse)	Accessories Set Screw
6~12	M4	M4×3
12.7~17	M5	M5×4
18~30	M6	M6×5
31~45	M8	M8×6




☐ When the material of the timing pulley is S45C, the retaining ring has flanging type.




Self-made

Pulley Shape
Shape A




Pulley Shape
Shape B




3/2

Standard Tooth Profile




* When the material is aluminum profile: $t_1 = (W-A)/2 - 0.5$, When the material is S45C: $t_1 = 1.5$.



The first perspective

☑ Shaft Bore Spec.

P Round Hole + Tap



N New JIS Keywayed Bore + Tap



☐ For Keyway Dimension Details, refer to the Timing Pulleys product introduction.

☐ To avoid damaging the integrity of the teeth, the screw hole is selected to be machined at the bottom of the tooth. Therefore, when the number of teeth cannot be divided equally as trisection, the screw hole will be drilled at the bottom of the closest teeth. And the angle of the screw hole will have slight deviation in that case, will not be exactly 120°

Part Number		Pulley Shape	Shaft Bore Spec.	Shaft Bore Spec. d _{H7} (1mm Increment)				P.D.	O.D.	D	F	E	Type Nominal Width		
Code	Teeth			Shape A		Shape B							A	W	L
				P	N	P	N								
(Aluminum Alloy) EAP01-T5100 EAP21-T5150 EAP41-T5200 EAP61-T5250	12	A		6~8	—	—	—	19.10	18.25	—	24	12	Belt Width 10 T5100 A:11 W:16 L:28		
	14			6~10	8	6~8	—	22.28	21.45	14	26	16			
	15			6~10	8~10	6~8		23.87	23.05	15	28	18			
	16			7~12	8~11	7~10	8	25.46	24.60	17	32	20			
	18			7~12	8~12	7~11	8~10	28.65	27.80		33	22	Belt Width 15 T5150 A:17 W:22 L:34		
	20			7~16	8~14	7~12	8~10	31.83	31.00	19	36	24			
	22			7~18	8~16	7~15	8~12	35.01	34.25	24	40	27			
	24			7~20	8~18	7~17	8~13	38.20	37.40		45	30			
	25			7~20	8~19	7~18	8~15	39.79	39.00	27	45	30	Belt Width 20 T5200 A:22 W:27 L:39		
	26	A	P	8~22	8~21	8~21	8~17	41.38	40.60	31	48	35			
28			8~24	8~23	8~22	8~18	44.56	43.75	32	48	35				
30	B	N	10~26	10~26	10~23	10~18	47.75	46.95	33	52	36				
(S45C) EAP12-T5100 EAP32-T5150 EAP52-T5200 EAP72-T5250	32			10~28	10~28	10~27	10~22	50.93	50.10	37	55	40	Belt Width 25 T5250 A:27 W:32 L:44		
	34			10~30	10~30	10~30	10~25	54.11	53.25	40	61	45			
	36			10~30	10~30	10~30	10~25	57.30	56.45	40	61	45			
	40			10~38	10~38	10~37	10~29	63.66	62.85	47	67	50			
	44			12~42	12~40	12~40	12~32	70.03	69.20	50	74	58			
	48			12~45	12~40	12~45	12~40	76.39	75.55	60	83	63			
	50			12~45	12~43	12~45	12~43	79.58	78.75	63	87	67			
	60			12~45	12~45	12~45	12~45	95.49	94.65	75	99	80			

☐ Shaft Bore Dia. 9 are not available for Shaft Bore specification N. ☐ Shaft Bore Dia. 6.35 is selectable for Shaft Bore specifications P

☐ Select N-d10K when New JIS Keywayed Bore + Tap with shaft bore diameter of 10 and keyway width 4.0 mm (height 1.8 mm) is requested. (Refer to the Timing pulley product introduction)



Please order as shown

Part Number	Pulley Shape	Shaft Bore Spec.	Shaft Bore Spec. d _{H7} (1mm Increment)
Code	Teeth		
EAP12-T5100	48	A	P
EAP21-T5150	50	B	N
EAP72-T5250	60	B	N

EAP72-T5250-60-A-N-d20



Discount price
Per 1~4 5~
Price 100% Additional quotation



Delivery
4

☐ Aluminum Alloy



Delivery
11

☐ S45C

T10 Type ▶

Pitch 10.0

Timing Pulleys

T10150	T10200	T10250	T10300	T10400	T10500	Pitch	Material		Surface Treatment
Belt Width 15	Belt Width 20	Belt Width 25	Belt Width 30	Belt Width 40	Belt Width 50		Pulley	Flange	
EAR01	EAR15	EAR29	EAR43	EAR57	EAR71	10.0	Aluminum Alloy		Clear Anodize
EAR09	EAR23	EAR37	EAR51	EAR65	EAR79		S45C	SPCC	Black Oxide

■ Tapped Hole Dimensions (Shaft Bore: P/N)

Shaft Bore Inner Dia. dH7	M (Coarse)	Accessories Set Screw
12	M4	M4×3
12.7~17	M5	M5×4
18~30	M6	M6×5
31~45	M8	M8×6
46~65	M10	M10×8




□ When the material of the timing pulley is S45C, the retaining ring has flanging type.





Self-made


Pulley Shape
Shape A



Pulley Shape
Shape B



Standard Tooth Profile




The first perspective

* When the material is aluminum profile: $t_1 = (W-A)/2 - 0.5$, When the material is S45C: $t_1 = 1.5$.

* $t_1 = 2.0$ for 60 toothed pulleys. (Cut Flange) ✖ 11 for T10250、T10300、T10400 with 44~60 teeth. $(L-W)/2$ for T10400 and T10500.

■ Shaft Bore Spec.

P Round Hole + Tap



N New JIS Keywayed Bore + Tap



□ For Keyway Dimension Details, refer to the Timing Pulleys product introduction.

□ To avoid damaging the integrity of the teeth, the screw hole is selected to be machined at the bottom of the tooth. Therefore, when the number of teeth cannot be divided equally as trisection, the screw hole will be drilled at the bottom of the closest teeth. And the angle of the screw hole will have slight deviation in that case, will not be exactly 120°

Part Number		Pulley Shape	Shaft Bore Spec.	Shaft Bore Spec.dH7 (1mm Increment)				P.D.	O.D.	D	F	E	Type Nominal Width		
				Shape A		Shape B							A	W	L
Code	Teeth			P	N	P	N								
(Aluminum Alloy)	12	A		12~18	12~15	—	—	38.20	36.35	—	40	27	Belt Width 15		
	14			12~26	12~20	12~22	12~20	44.56	42.70	32	48	35	T10150		
	15			12~26	12~22	12~23	12~20	47.75	45.90	33	52	36	A:17		
	16			12~30	12~26	12~27	12~22	50.93	49.05	37	58	40	W:22		
	18			12~30	12~30	12~30	12~25	57.30	55.45	40	61	45	L:37		
	20			12~40	12~36	12~35	12~29	63.66	61.80	47	67	50	Belt Width 20		
	22			14~48	14~38	14~38	14~32	70.03	68.15	50	80	60	T10200		
	24			14~50	14~44	14~46	14~40	76.39	74.55	60	87	67	A:22		
	25			14~50	14~47	14~49	14~43	79.58	77.70	67	87	67	W:27		
	26	A	P	14~50	14~50	14~49	14~43	82.76	80.90	63	87	67	L:42		
	28	B	N	16~57	16~50	16~56	16~48	89.13	87.25	70	95	75	Belt Width 25		
	30			16~65	16~50	16~61	16~50	95.49	93.65	75	104	84	T10250		
(S45C)	32			20~65	20~50	20~65	20~50	101.86	100.00	85	111	90	A:32		
	34			20~65	20~50	20~65	20~50	108.23	106.4	90	115	95	W:37		
	36			20~65	20~50	20~65	20~50	114.59	112.75	95	123	102	L:52(57)		
	40			20~65	20~50	20~65	20~50	127.32	125.45		135	115	Belt Width 40		
	44			20~65	20~50	20~65	20~50	140.06	138.20		152	130	T10400		
	48			20~65	20~50	20~65	20~50	152.79	150.95	100	160	140	A:43		
	50			20~65	20~50	20~65	20~50	159.15	157.3		170	150	W:48		
	60			20~65	20~50	20~65	20~50	190.99	189.1		200	180	L:61(63)★		
													Belt Width 50		
													T10500		
													A:53		
													W:58		
												L:70★			

★ L dimensions in () are for 44~60 toothed pulleys.

□ Select N-d10K when New JIS Keywayed Bore + Tap with shaft bore diameter of 10 and keyway width 4.0 mm (height 1.8 mm) is requested. (Refer to the Timing pulley product introduction)



Please order as shown

Part Number	Pulley Shape	Shaft Bore Spec.	Shaft Bore Spec. dH7 (1mm Increment)
Code	Teeth		Shape A Shape B
EAR37-T10250	48	A	P
EAR51-T10300	50	B	N
EAR79-T10500	60	B	N

EAR51-T10300 — 60 — A — N — d20



Discount price
Per 1~4 5~
Price 100% Additional quotation



Delivery
4

□ Aluminum Alloy



Delivery
11

□ S45C

www.yhdfa.vn

Factory Automation Parts
One-Stop Purchasing Platform

Minimize procurement costs.
Ordering online saves more time.

Improve efficiency and save 50% design time !

3D model library Example Catalog for selection

High Torque Timing Pulleys

◀ S2M Type
Pitch 2.0

S2M040	S2M060	S2M100	Pitch	Material		Surface Treatment
Belt Width 4	Belt Width 6	Belt Width 10		Pulley	Flange	
EBC01	EBC21	EBC41	2.0	Aluminum Alloy		Clear Anodize
EBC12	EBC32	EBC51		S45C	SPCC	Black Oxide

■ Tapped Hole Dimensions (Shaft Bore: P / N)


Shaft Bore Inner Dia. d _{H7}	M (Coarse)	Accessories Set Screw
3~5	M3	M3×3
6~22	M4	M4×3




① When the material of the timing pulley is S45C, the retaining ring has flanging type.




Standard Tooth Profile




Pulley Shape
Shape A



Pulley Shape
Shape B




Pulley Shape
Shape K



* When the material is aluminum profile: $t_1 = (W-A)/2 - 0.5$, When the material is S45C: $t_1 = 1.5$.

■ Shaft Bore Spec.

P Round Hole + Tap



N New JIS Keywayed Bore + Tap



① For Keyway Dimension Details, refer to the Timing Pulleys product introduction.

① To avoid damaging the integrity of the teeth, the screw hole is selected to be machined at the bottom of the tooth. Therefore, when the number of teeth cannot be divided equally as trisection, the screw hole will be drilled at the bottom of the closest teeth. And the angle of the screw hole will have slight deviation in that case, will not be exactly 120°

Part Number		Pulley Shape	Shaft Bore Spec.	Shaft Bore Spec. _{dH7} (1mm Increment)				P.D.	O.D.	D	F	E	Type Nominal Width		
Code	Teeth			Shape A		Shape B-K							A	W	L
				P	N	P	N								
(Aluminum Alloy) EBC01-S2M040 EBC21-S2M060 EBC41-S2M100	14					3-4		8.91	8.4	12	12	6	Belt Width 4 S2M040 A:5 W:9 L:17		
	15					3-4		9.55	9.04	12	12	6			
	16					3-4-5		10.19	9.68	14	14	8			
	18					3-4-5		11.46	10.95	14	14	8			
	20					3-6		12.73	12.22	16	16	10	Belt Width 6 S2M060 A:7 W:11 L:19		
	22	A				3-6		14.01	13.5	18	18	11			
	23	K		—	—	3-6		14.64	14.13	18	18	11			
	24					3-7	—	15.28	14.77	20	20	13			
	25					3-7		15.92	15.41	20	20	13	Belt Width 10 S2M100 A:11 W:15 L:23		
	26					3-8		16.55	16.04		22	14			
	28					3-8		17.83	17.32	22	22	14			
	30					3-8		19.10	18.59		22	14			
(S45C) EBC12-S2M040 EBC32-S2M060 EBC51-S2M100	32			4~10	8	4-5-6		20.37	19.86	12	26	16			
	34			4~10	8~10	4-8		21.65	21.14	14	26	16			
	36			4~10	8~10	4-8		22.92	22.41	14	28	18			
	40			4~12	8~12	4~10	8	25.46	24.96	18	30	20			
	44			5~13	8~13	5~12	8~11	28.01	27.5		32	23			
	48	B		5~15	8~15	5~12	8~11	30.56	30.05	20	35	25			
	50			5~16	8~16	5~12	8~11	31.83	31.32		35	25			
	60			5~22	8~22	5~22	8~16	38.20	37.69	30	44	32			
	72			5~24	8~22	5~24	—	45.84	45.33	34	50	38			

① Shaft Bore Dia. 9 are not available for Shaft Bore specification N.

① Select N-d10K when New JIS Keywayed Bore + Tap with shaft bore diameter of 10 and keyway width 4.0 mm (height 1.8 mm) is requested. (Refer to the Timing pulley product introduction)



Please order as shown

Part Number	Pulley Shape	Shaft Bore Spec.	Shaft Bore Spec. d _{H7} (1mm Increment)			
Code	Teeth		Shape A	Shape B-K		
EBC01-S2M040	36	A	P	4~10	6~10	4-8
EBC21-S2M060	40	B	N	4~12	8~12	4~10

EBC01-S2M040 - 36 - A - N - d8



Discount price	Per	1~4	5~
Price 100%			Additional quotation



Delivery	4
----------	---

① Aluminum Alloy



Delivery	11
----------	----

① S45C

S3M Type ▶ High Torque Timing Pulleys

Pitch 3.0




S3M060	S3M100	S3M150	Pitch	Material		Surface Treatment
Belt Width 6	Belt Width 10	Belt Width 15	3.0	Pulley	Flange	
EBF01	EBF21	EBF41		Aluminum Alloy		Clear Anodize
EBF12	EBF32	EBF52		S45C	SPCC	Black Oxide

■ Tapped Hole Dimensions (Shaft Bore: P/N)

Shaft Bore Inner Dia. d _{H7}	M (Coarse)	Accessories Set Screw
4~5	M3	M3×3
6~17	M4	M4×3
18~33	M5	M5×4
34~42	M6	M6×5




① When the material of the timing pulley is S45C, the retaining ring has flanging type.

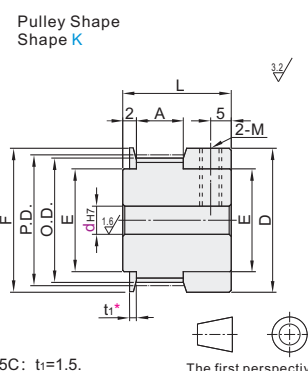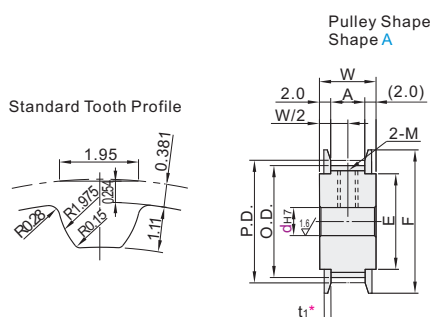

* When the material is aluminum profile: $t_1 = (W-A)/2 - 0.5$, When the material is S45C: $t_1 = 1.5$.

■ Shaft Bore Spec.

P Round Hole + Tap



N New JIS Keywayed Bore + Tap



① For Keyway Dimension Details, refer to the pulley product introduction.

① To avoid damaging the integrity of the teeth, the screw hole is selected to be machined at the bottom of the tooth. Therefore, when the number of teeth cannot be divided equally as trisection, the screw hole will be drilled at the bottom of the closest teeth. And the angle of the screw hole will have slight deviation in that case, will not be exactly 120°

Part Number		Pulley Shape	Shaft Bore Spec.	Shaft Bore Spec. d _{H7} (1mm Increment)				P.D.	O.D.	D	F	E	Type Nominal Width								
Code	Teeth			Shape A		Shape B-K							A	W	L						
(Aluminum Alloy)	14	A		—		4-5-6		13.37	12.61	16	16	10	Belt Width 6 S3M060 A:7 W:11 L:19								
	15					4-5-6		14.32	13.56	18	18	11									
	16					4-7		15.28	14.52	18	18	11									
	18					4-8		17.19	16.43	20	20	13									
	19	K		4-5-6	—	4-8		18.14	17.38	22	22	14				Belt Width 10 S3M100 A:11 W:15 L:23					
	20					4-8		19.10	18.34	22	22	14									
	22	P		4-8		4-10		21.01	20.25	25	25	16				Belt Width 15 S3M150 A:17 W:21 L:29					
	24					4-10		22.92	22.16	14	25	16									
	25					4-11		8-10-11	4-10	8	23.87	23.11							16	28	18
	26					5-11		8-10-11	5-10	8	24.83	24.07							16	28	18
28	5-13					8-13		5-10	8	26.74	25.98	18	30	20							
30	6-14					8-14		6-12	8-11	28.65	27.89	20	32	23							
(S45C)	32	A		6-16	8-16	6-12	8-11	30.56	29.80	26	40	28	Belt Width 15 S3M150 A:17 W:21 L:29								
	34					6-18	8-17	6-18	8-13		32.47	31.71				35	25				
	36					6-18	8-17	6-18	8-13		34.38	33.62				40	28				
	40					8-23	8-20	8-21	8-16		38.20	37.44				30	44	32			
	44	B		8-25	8-24	8-23	8-18	42.02	41.25	32	48	36									
	48					8-25	8-25	8-25	8-20	45.84	45.07	34							50	38	
	50					8-28	8-28	8-25	8-20	47.75	46.98	52							40		
	60					8-33	8-33	8-30	8-22	57.30	56.53	39							61	45	
72	8-42	8-40	8-38	—	68.75	67.99	50	74	58												

① Shaft Bore Dia. 9 are not available for Shaft Bore specification N.

① Shaft bore specification P is not selectable for A Shape with 22 or less teeth and nominal width 060.

① Select N-d10K when New JIS Keywayed Bore + Tap with shaft bore diameter of 10 and keyway width 4.0 mm (height 1.8 mm) is requested. (Refer to the Timing pulley product introduction)



Part Number		Pulley Shape	Shaft Bore Spec.	Shaft Bore Spec. d _{H7} (1mm Increment)			
Code	Teeth			Shape A	Shape B-K	Shape A	Shape B-K
EBF32-S3M100	32	A	P	6~16	6~16	6~12	8~11
EBF52-S3M150	34	B	N	6~18	8~17	6~18	8~13

EBF52-S3M150 - 32 - A - N - d16



Discount price	
Per	1~4 5~
Price	100% Additional quotation



Delivery	
4	

① Aluminum Alloy



Delivery	
11	

① S45C

www.yhdfa.vn

Factory Automation Parts
One-Stop Purchasing Platform

Minimize procurement costs.
Ordering online saves more time.

Improve efficiency and save 50% design time !

3D model library Example Catalog for selection

High Torque Timing Pulleys

◀ S5M Type
Pitch 5.0



S5M100	S5M150	S5M250	Pitch	Material		Surface Treatment
Belt Width 10	Belt Width 15	Belt Width 25		Pulley	Flange	
EBJ01	EBJ21	EBJ41	5.0	Aluminum Alloy		Clear Anodize
EBJ12	EBJ32	EBJ52		S45C	SPCC	Black Oxide

■ Tapped Hole Dimensions (Shaft Bore: P / N)


Shaft Bore Inner Dia. d _{H7}	M (Coarse)	Accessories Set Screw
6~12	M4	M4×3
13~17	M5	M5×4
18~30	M6	M6×5
31~45	M8	M8×6
46~65	M10	M10×8




ⓘ When the material of the timing pulley is S45C, the retaining ring has flanging type.




Pulley Shape
Shape A



Pulley Shape
Shape B




* When the material is aluminum profile: $t_1 = (W-A)/2 - 0.5$, When the material is S45C: $t_1 = 1.5$.



■ Shaft Bore Spec.

P Round Hole + Tap



N New JIS Keywayed Bore + Tap



ⓘ For Keyway Dimension Details, refer to the Timing Pulleys product introduction.

ⓘ To avoid damaging the integrity of the teeth, the screw hole is selected to be machined at the bottom of the tooth. Therefore, when the number of teeth cannot be divided equally as trisection, the screw hole will be drilled at the bottom of the closest teeth. And the angle of the screw hole will have slight deviation in that case, will not be exactly 120°.

Part Number		Pulley Shape	Shaft Bore Spec.	Shaft Bore Spec. d _{H7} (1mm Increment)				P.D.	O.D.	D	F	E	Type Nominal Width		
Code	Teeth			Shape A		Shape B							A	W	L
(Aluminum Alloy) EBJ01-S5M100 EBJ21-S5M150 EBJ41-S5M250	14			6~10	8	6~8	—	22.28	21.32	14	26	16	Belt Width 10 S5M100 A:11 W:16 L:28		
	15			6~10	8~10	6~8		23.87	22.91	15	28	18			
	16			7~12	8~11	7~10	8	25.46	24.50	17	32	20			
	18			7~12	8~12	7~11	8~10	28.65	27.69		33	22			
	19			6~16	8~13	6~11	8~10	30.24	29.28	19	36	24			
	20			7~16	8~14	7~11	8~10	31.83	30.87		36	24	Belt Width 15 S5M150 A:17 W:22 L:34		
	22			7~18	8~15	7~15	8~12	35.01	34.05	24	40	27			
	24			7~20	8~18	7~17	8~13	38.20	37.24						
	25			7~20	8~19	7~17	8~15	39.79	38.83	27	45	30			
	26	A	P	8~22	8~21	8~21	8~17	41.38	40.42	31				Belt Width 25 S5M250 A:27 W:32 L:44	
28			8~24	8~23	8~22	8~18	44.56	43.60	32	48	35				
30	B	N	10~26	10~26	10~23	10~18	47.75	46.79	33	52	36				
32			10~28	10~28	10~27	10~22	50.93	49.97	37	55	40				
34			10~30	10~30	10~30	10~25	54.11	53.15							
(S45C) EBJ12-S5M100 EBJ32-S5M150 EBJ52-S5M250	36			10~30	10~30	10~30	10~25	57.30	56.34	40	61	45			
40				10~38	10~38	10~35	10~28	63.66	62.70	47	67	50			
44				12~42	12~40	12~38	12~32	70.03	69.07	50	74	58			
48				12~45	12~40	12~45	12~40	76.39	75.43	60	83	63			
50				12~45	12~43	12~45	12~43	79.58	78.62	63	87	67			
60				12~45	12~45	12~45	12~45	95.49	94.53	75	99	80			
72				12~65	12~50	12~65	12~50	114.59	113.63	90	119	100			

ⓘ Shaft Bore Dia. 9 are not available for Shaft Bore specification N.

ⓘ Select N-d10K when New JIS Keywayed Bore + Tap with shaft bore diameter of 10 and keyway width 4.0 mm (height 1.8 mm) is requested. (Refer to the Timing pulley product introduction)



Part Number		Pulley Shape	Shaft Bore Spec.	Shaft Bore Spec. d _{H7} (1mm Increment)			
Code	Teeth			Shape A	Shape B		
EBJ01-S5M100	(36)	A	P	10~30	10~30	10~30	10~25
EBJ21-S5M150	40	B	N	10~38	10~38	10~35	10~28

EBJ01-S5M100 - 36 - A - N - d20



Discount price	
Per	1~4 5~
Price	100% Additional quotation



Delivery	
	4

ⓘ Aluminum Alloy



Delivery	
	11

ⓘ S45C

S8M Type

Pitch 8.0

High Torque Timing Pulleys

S8M150	S8M250	S8M300	S8M400	Pitch	Material		Surface Treatment
Belt Width 15	Belt Width 25	Belt Width 30	Belt Width 40		Pulley	Flange	
EBL01	EBL21	EBL41	EBL61	8.0	Aluminum Alloy		Clear Anodize
EBL12	EBL32	EBL52	EBL72		S45C	SPCC	Black Oxide



Tap Hole Dimensions (Shaft Bore: P / N)




Shaft Bore Inner Dia. d _{H7}	M (Coarse)	Accessories Set Screw
12	M4	M4×3
12.7~17	M5	M5×4
18~30	M6	M6×5
31~45	M8	M8×6
46~65	M10	M10×8



When the material of the timing pulley is S45C, the retaining ring has flanging type.

Pulley Shape Shape A

Pulley Shape Shape B

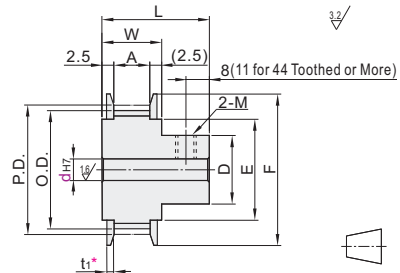


* When the material is aluminum profile: $t_1 = (W-A)/2 - 0.5$, When the material is S45C: $t_1 = 1.5$. * $t_1 = 2.0$ for 72 toothed pulleys. (Cut Flange)

Shaft Bore Spec.

P Round Hole + Tap

N New JIS Keywayed Bore + Tap



For Keyway Dimension Details, refer to the Timing Pulleys product introduction.

To avoid damaging the integrity of the teeth, the screw hole is selected to be machined at the bottom of the tooth. Therefore, when the number of teeth cannot be divided equally as trisection, the screw hole will be drilled at the bottom of the closest teeth. And the angle of the screw hole will have slight deviation in that case, will not be exactly 120°

Part Number		Pulley Shape	Shaft Bore Spec.	Shaft Bore Spec. _{dH7} (1mm Increment)				P.D.	O.D.	D	F	E	Type Nominal Width				
Code	Teeth			Shape A		Shape B							A	W	L		
			18			12~26	12~24	12~22	12~20	45.84	44.46	32	52	36			
(Aluminum Alloy)	19			12~28	12~26	12~25	12~20	48.38	47.01	35	55	40	Belt Width 15 S8M150 A:17 W:22 L:37(42)★				
	20			12~30	12~29	12~26	12~22	50.93	49.56	36	58						
	21			12~32	12~29	12~30	12~24	53.48	52.10	40	61	45					
	22			12~34	12~32	12~30	12~25	56.02	54.65	41							
	24			12~40	12~37	12~34	12~28	61.12	59.74	46	67	50					
	EBL01-S8M150	25			12~40	12~40	12~36	12~28	63.66	62.29	48	70	56	Belt Width 25 S8M250 A:28 W:33 L:48(53)★			
	EBL21-S8M250	26			14~45	14~41	14~39	14~31	66.21	64.84	51	74	58				
	EBL41-S8M300	28			14~48	14~43	14~43	14~35	71.30	69.93	55	80	60				
	EBL61-S8M400	30	A	P	14~50	14~47	14~46	14~38	76.39	75.02	60	87	67				
		32	B	N	14~55	14~50	14~49	14~45	81.49	80.12	63						
(S45C)	34			16~60	16~50	16~56	16~48	86.58	85.21	70	95	75	Belt Width 30 S8M300 A:33 W:38 L:53(58)★				
EBL12-S8M150	36			16~65	16~50	16~61	16~50	91.67	90.30	75	99	80					
EBL32-S8M250	38			16~65	16~50	16~65	16~50	96.77	95.39	80	104	84					
EBL52-S8M300	40			20~65	20~50	20~65	20~50	101.86	100.49	85	111	90	Belt Width 40 S8M400 A:44 W:49 L:64(69)★				
EBL72-S8M400	44			20~65	20~50	20~65	20~50	112.05	110.67	90	119	100					
	48			20~65	20~50	20~65	20~50	122.23	120.86	100	127	105					
	50			20~65	20~50	20~65	20~50	127.32	125.95		135	115					
	60			20~65	20~50	20~65	20~50	152.79	151.42		160	140					
	72			20~65	20~50	20~65	20~50	183.35	181.97		190	170					

Select N-d10K when New JIS Keywayed Bore + Tap with shaft bore diameter of 10 and keyway width 4.0 mm (height 1.8 mm) is requested. (Refer to the Timing pulley product introduction)

★ L Dimensions in () are for 44~60 toothed pulleys.



Part Number		Pulley Shape	Shaft Bore Spec.	Shaft Bore Spec. d _{H7} (1mm Increment)			
Code	Teeth			Shape A		Shape B	
EBL41-S8M300	30	A	P	14-50	14-47	14-46	14-38
EBL61-S8M400	32	B	N	14-55	14-50	14-49	14-45

EBL61-S8M400 - 30 - A - N - d20



Discount price	
Per	1~4
Price	100%



Delivery	
4	

Aluminum Alloy



Delivery	
11	

S45C

www.yhdfa.vn

Factory Automation Parts
One-Stop Purchasing Platform

Minimize procurement costs.
Ordering online saves more time.

Improve efficiency and save 50% design time !

3D model library Example Catalog for selection