


■ Cat5E STP LAN Cable

Code	Type	Shield	Core Material
ZKQ05	Cat5E STP LAN Cable	High Quality	Shielded
			Oxygen-Free Copper


■ Features

- Twisted wire type facilitates wiring work;
- Anti-claw breakage structure, the claw is not easy to break;
- The crystal head is gold-plated with 50μ.

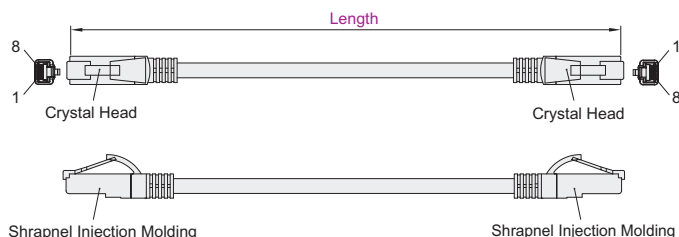

■ Wiring Diagram

CN1	CN2
1	1 Orange and White
2	2 Orange
3	3 Green and White
4	4 Blue
5	5 Blue and White
6	6 Green
7	7 Brown and White
8	8 Brown



■ Parameters Table

Standard	ANSI/TIA-568-B.2(Suitable for up to 1000BASE-T)
Category	Cat5E
Connector	RJ45
Cable	Conductor Multiple Legs
	Conductor Specifications AWG 24
	Minimum Bending Radius Cable Diameter × 4 Times
Wiring Type	Same Number Wiring
Temperature Range	< 75°

Part Number	Length (m)	Cable Conductor	Outer Diameter
Code	Color		
ZKQ05	BK(Black)	Twisted Wire	6.6±0.2
	1		
	2		
	3		
	5		
	10		



Part Number	Length (m)
Code	Color
ZKQ05	BK
	1
	2


ZKQ05—BK—1

■ Cat6 STP LAN Cable

Code	Type	Shield	Core Material
ZKQ11	Cat6 STP LAN Cable	High Quality	Shielded
			Oxygen-Free Copper


■ Features

- Single-core cable type, suitable for long-distance transmission;
- Anti-claw breakage structure, the claw is not easy to break;
- The crystal head is gold-plated with 50μ.

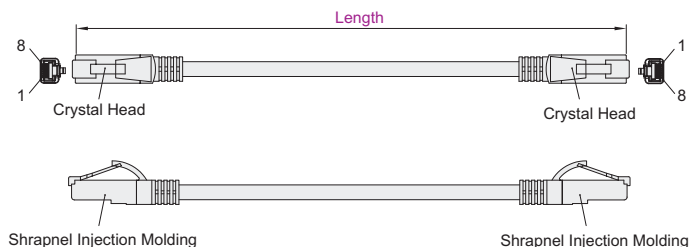

■ Wiring Diagram

CN1	CN2
1	1 Orange and White
2	2 Orange
3	3 Green and White
4	4 Blue
5	5 Blue and White
6	6 Green
7	7 Brown and White
8	8 Brown



■ Parameters Table

Standard	ANSI/TIA-568-B.2(Up to 1000BASE-TX)
Cable	Conductor Single Core
	Conductor Specifications AWG24
	Minimum Bending Radius Cable Diameter × 15 Times
Wiring Type	Same Number Wiring
Temperature Range	< 75°C

Part Number	Length (m)	Cable Conductor	Outer Diameter
Code	Color		
ZKQ11	BK(Black)	Single Core	6.5±0.2
	1		
	2		
	3		
	5		
	10		



Part Number	Length (m)
Code	Color
ZKQ11	BK
	1
	2

ZKQ11—BK—1